

Wall-Mounted Condensate Pump

Dual Guarantee, High Security

- High performance brushless motor, strong power
- Level gauge installed, ensure the accurate installation
- Dual-control system, improve durability
- Built-in LEDs provide visual operating feedback

P18 P36



INSTRUCTIONS



FEATURES



Dual-control system(probe&float)



Buzzer fault alarm





Led running light



Easy access to installment

DIMENSIONS

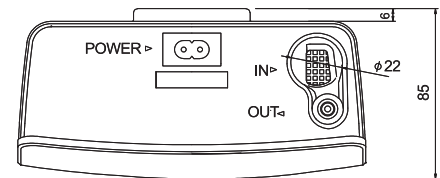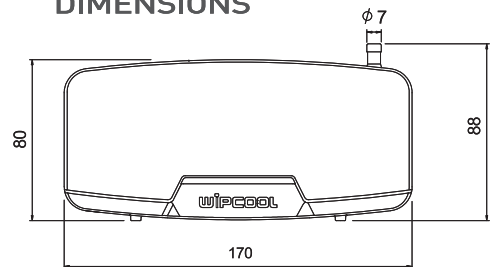

TECHNICAL DATA :		
Model	P18	P36
Voltage	100V-230V~/50-60Hz	
Discharge Head(max.)	10m(33ft)	
Flow Rate(max.)	18L/h(4.8GPH)	36L/h(9.6GPH)
Tank Capacity	150ml	
Mini Splits up to	30,000btu/hr	45,000btu/hr
Sound Level at 1m	19dB(A)	21dB(A)
Ambient Temp.	0°C~50°C	

FLOW RATE

