



MTRAXL

CÓDIGO NUEVO ERO	ANTES	VOLTAJE		ROTACIÓN	HZ	WATTS AMPERES		RPM	VOLUMEN AIRE M3/H	NIVEL DE SODIO DBA	CAPACITOR (UF)	TEMPERATURA AMBIENTE	PROTECTOR
		(V)				(W)	(A)						
MTRAX1F11V020	MTRAXL210	110		CCW	60	40	0.36	1600	745 (10 PA)	52	6/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX1F22V020	MTRAXL220	220		CCW	60	50	0.21	1600	745 (10 PA)	52	1.5/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX1F11V025	MTRAXL251	110		CCW	60	50	0.52	1600	955 (10 PA)	60	8/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX1F22V025	MTRAXL252	220		CCW	60	60	0.28	1600	955 (10 PA)	60	2/450V	150 (+/-) 5°C	-30 A 60°C
MTRDS1F22V030	MTRAXD300	220		CW	60	115	0.51	1600	1450/1700 (10 PA)	58	3/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX1F22V030	MTRAXL300	220		CCW	60	115	0.51	1600	1450/1700 (10 PA)	58	3/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX1F11V030	MTRAXL301	110		CCW	60	115	0.95	1550	1450/1700 (10 PA)	58	3/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX3F44V030	MTRAXL304	440		CCW	60	90	0.22	1380	1450/1700 (10 PA)	58	3/450V	150 (+/-) 5°C	-30 A 60°C
MTRDS1F22V035	MTRAXD350	220		CW	60	190	0.83	1550	2280/2600 (10 PA)	62	4/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX1F22V035	MTRAXL350	220		CCW	60	180	0.83	1550	2280/2600 (10 PA)	62	4/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX1F11V035	MTRAXL351	110		CCW	60	180	0.83	1550	2280/2600 (10 PA)	62	4/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX3F44V035	MTRAXL354	440		CCW	60	190	0.30	1550	2280/2600 (10 PA)	62	4/450V	150 (+/-) 5°C	-30 A 60°C
MTRDS1F22V040	MTRAXD400	220		CW	60	270	1.22	1510	3750 (10 PA)	68	6/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX1F22V040	MTRAXL400	220		CCW	60	220	1.22	1510	3750 (10 PA)	68	6/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX1F11V040	MTRAXL401	110		CCW	60	220	1.22	1510	3750 (10 PA)	68	6/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX3F44V040	MTRAXL404	440		CCW	60	250	0.40	1560	3750 (10 PA)	68	6/450V	150 (+/-) 5°C	-30 A 60°C
MTRDS1F22V045	MTRAXD450	220		CW	60	330	1.50	1600	4750/5100 (10 PA)	68	7/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX1F22V045	MTRAXL450	220		CCW	60	330	1.50	1600	4750/5100 (10 PA)	68	7/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX3F44V045	MTRAXL454	440		CCW	60	330	0.56	1600	4750/5100 (10 PA)	68	8/450V	150 (+/-) 5°C	-30 A 60°C
MTRDS1F22V050	MTRAXD500	220		CW	60	500	2.50	1450	6480/6800 (10 PA)	72	10/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX1F22V050	MTRAXL500	220		CCW	60	500	2.50	1450	6480/6800 (10 PA)	72	10/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX3F44V050	MTRAXL504	440		CCW	60	500	0.85	1550	6480/6800 (10 PA)	72	10/450V	150 (+/-) 5°C	-30 A 60°C
MTRDS1F22V055	MTRAXD550	220		CW	60	600	2.80	1550	8100 (10 PA)	75	10/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX1F22V055	MTRAXL550	220		CCW	60	600	2.80	1550	8100 (10 PA)	75	10/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX3F44V055	MTRAXL554	440		CCW	60	550	0.85	1600	8100 (10 PA)	75	10/450V	150 (+/-) 5°C	-30 A 60°C
MTRDS1F22V060	MTRAXD600	220		CW	60	860	3.90	1640	9500 (10 PA)	75	16/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX1F22V060	MTRAXL600	220		CCW	60	860	3.90	1640	9500 (10 PA)	75	16/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX3F44V060	MTRAXL604	440		CCW	60	604	1.15	1560	9500 (10 PA)	75	16/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX1F22V063	MTRAXL630	220		CCW	60	950	4.6	1600	10200 (10 PA)	78	16/450V	150 (+/-) 5°C	-30 A 60°C
MTRAX3F44V071	-	220-440		CW	60	1250	3.5 - 2	1640	-	-	-	-	-
MTRAX3F44V080	-	220-440		CW	60	1850	6.5 - 3.5	1560	-	-	-	-	-
MTRAX3F44V091	-	220-440		CW	60	2500	8 - 4.3	1600	-	-	-	-	-

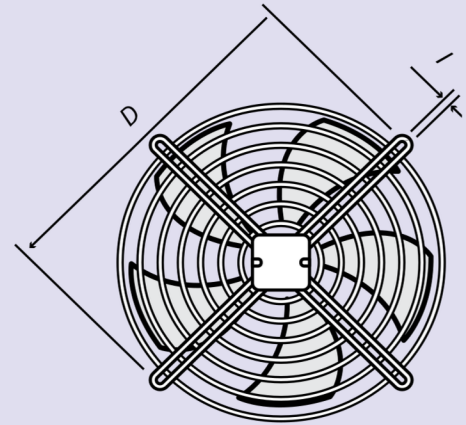

MTRAXD

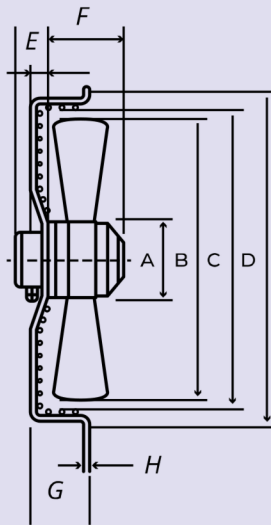

CÓDIGO ERO	NÚMERO DE FASES	MOTOR DIÁMETRO cm (in)					MOTOR LONGITUD cm (in)				
		A	B	C	D	E	F	G	H	I	
MTRAX1F11V020	MONOFÁSICO	84 (3.30)	200 (7.87)	230 (9.05)	280 (11.02)	60 (2.36)	76 (2.99)	48 (1.88)	4 (0.15)	8.3 (0.32)	
MTRAX1F22V020	MONOFÁSICO	84 (3.30)	200 (7.87)	230 (9.05)	280 (11.02)	60 (2.36)	76 (2.99)	48 (1.88)	4 (0.15)	8.3 (0.32)	
MTRAX1F11V025	MONOFÁSICO	91 (3.58)	250 (9.84)	280 (11.02)	320 (12.59)	60 (2.36)	84 (3.30)	60 (2.36)	5 (0.19)	8.5 (0.33)	
MTRAX1F22V025	MONOFÁSICO	91 (3.58)	250 (9.84)	280 (11.02)	320 (12.59)	60 (2.36)	84 (3.30)	60 (2.36)	5 (0.19)	8.5 (0.33)	
MTRDS1F22V030	MONOFÁSICO	92 (3.62)	300 (11.81)	320 (12.59)	360 (14.70)	60 (2.36)	86 (3.38)	80 (3.14)	4 (0.15)	7 (0.27)	
MTRAX1F22V030	MONOFÁSICO	92 (3.62)	300 (11.81)	320 (12.59)	360 (14.70)	60 (2.36)	86 (3.38)	80 (3.14)	4 (0.15)	7 (0.27)	
MTRAX1F11V030	MONOFÁSICO	92 (3.62)	300 (11.81)	320 (12.59)	360 (14.70)	60 (2.36)	86 (3.38)	80 (3.14)	4 (0.15)	7 (0.27)	
MTRAX3F44V030	TRIFÁSICO	92 (3.62)	300 (11.81)	320 (12.59)	360 (14.70)	60 (2.36)	86 (3.38)	80 (3.14)	4 (0.15)	7 (0.27)	
MTRDS1F22V035	MONOFÁSICO	102 (4.01)	350 (13.77)	370 (14.56)	422 (16.61)	60 (2.36)	104 (4.09)	80 (3.14)	5 (0.19)	9.5 (0.37)	
MTRAX1F22V035	MONOFÁSICO	102 (4.01)	350 (13.77)	370 (14.56)	422 (16.61)	60 (2.36)	104 (4.09)	80 (3.14)	5 (0.19)	9.5 (0.37)	
MTRAX1F11V035	MONOFÁSICO	102 (4.01)	350 (13.77)	370 (14.56)	422 (16.61)	60 (2.36)	104 (4.09)	80 (3.14)	5 (0.19)	9.5 (0.37)	
MTRAX3F44V035	TRIFÁSICO	102 (4.01)	350 (13.77)	370 (14.56)	422 (16.61)	60 (2.36)	104 (4.09)	80 (3.14)	5 (0.19)	9.5 (0.37)	
MTRDS1F22V040	MONOFÁSICO	102 (4.01)	400 (15.74)	420 (16.53)	470 (18.50)	60 (2.36)	117 (4.60)	90 (3.54)	5 (0.19)	9.5 (0.37)	
MTRAX1F22V040	MONOFÁSICO	102 (4.01)	400 (15.74)	420 (16.53)	470 (18.50)	60 (2.36)	117 (4.60)	90 (3.54)	5 (0.19)	9.5 (0.37)	
MTRAX1F11V040	MONOFÁSICO	102 (4.01)	400 (15.74)	420 (16.53)	470 (18.50)	60 (2.36)	117 (4.60)	90 (3.54)	5 (0.19)	9.5 (0.37)	
MTRAX3F44V040	TRIFÁSICO	102 (4.01)	400 (15.74)	420 (16.53)	470 (18.50)	60 (2.36)	117 (4.60)	90 (3.54)	5 (0.19)	9.5 (0.37)	
MTRDS1F22V045	MONOFÁSICO	102 (4.01)	450 (17.71)	470 (18.50)	522 (20.55)	60 (2.36)	130 (5.11)	90 (3.54)	6 (0.23)	9.5 (0.37)	
MTRAX1F22V045	MONOFÁSICO	102 (4.01)	450 (17.71)	470 (18.50)	522 (20.55)	60 (2.36)	130 (5.11)	90 (3.54)	6 (0.23)	9.5 (0.37)	
MTRAX3F44V045	TRIFÁSICO	102 (4.01)	450 (17.71)	470 (18.50)	522 (20.55)	60 (2.36)	130 (5.11)	90 (3.54)	6 (0.23)	9.5 (0.37)	
MTRDS1F22V050	MONOFÁSICO	137 (5.39)	500 (19.68)	520 (20.47)	570 (22.44)	60 (2.36)	129 (5.07)	90 (3.54)	6 (0.23)	10.5 (0.41)	
MTRAX1F22V050	MONOFÁSICO	137 (5.39)	500 (19.68)	520 (20.47)	570 (22.44)	60 (2.36)	129 (5.07)	90 (3.54)	6 (0.23)	10.5 (0.41)	
MTRAX3F44V050	TRIFÁSICO	137 (5.39)	500 (19.68)	520 (20.47)	570 (22.44)	60 (2.36)	129 (5.07)	90 (3.54)	6 (0.23)	10.5 (0.41)	
MTRDS1F22V055	MONOFÁSICO	137 (5.39)	550 (21.65)	570 (22.44)	620 (24.40)	60 (2.36)	144 (5.66)	100 (3.93)	6 (0.23)	10.5 (0.41)	
MTRAX1F22V055	MONOFÁSICO	137 (5.39)	550 (21.65)	570 (22.44)	620 (24.40)	60 (2.36)	144 (5.66)	100 (3.93)	6 (0.23)	10.5 (0.41)	
MTRAX3F44V055	TRIFÁSICO	137 (5.39)	550 (21.65)	570 (22.44)	620 (24.40)	60 (2.36)	144 (5.66)	100 (3.93)	6 (0.23)	10.5 (0.41)	
MTRDS1F22V060	MONOFÁSICO	137 (5.39)	600 (23.62)	620 (24.40)	679 (26.73)	60 (2.36)	164 (6.45)	100 (3.93)	7.5 (0.29)	10.5 (0.41)	
MTRAX1F22V060	MONOFÁSICO	137 (5.39)	600 (23.62)	620 (24.40)	679 (26.73)	60 (2.36)	164 (6.45)	100 (3.93)	7.5 (0.29)	10.5 (0.41)	
MTRAX3F44V060	TRIFÁSICO	137 (5.39)	600 (23.62)	620 (24.40)	679 (26.73)	60 (2.36)	164 (6.45)	100 (3.93)	7.5 (0.29)	10.5 (0.41)	
MTRAX1F22V063	MONOFÁSICO	137 (5.39)	630 (24.80)	650 (25.59)	750 (29.52)	60 (2.36)	164 (6.45)	100 (3.93)	7.5 (0.29)	10.5 (0.41)	
MTRAX3F44V071	TRIFÁSICO	-	710 (27.95)	-	-	-	-	-	-	-	
MTRAX3F44V080	TRIFÁSICO	-	800 (31.5)	-	-	-	-	-	-	-	
MTRAX3F44V091	TRIFÁSICO	-	910 (35.82)	-	-	-	-	-	-	-	